



rexresearch.com

Pyramid Energy Patents (II)



See also : [Pyramid Patents \(I \)](#)

[RO121993](#)

PYRAMID-TYPE CONSTRUCTION FOR RELAXATION

[KR20040076310](#)

STRUCTURE OF SWEATING BATHROOM USING THE PRINCIPLE OF GATHERING ENERGY IN THE FORM OF A PYRAMID AND IMPROVING ENDURANCE

[RO125394](#)

SQUARE PYRAMID-SHAPED METAL CONSTRUCTION WITH QUARTZ CRYSTALS IN THE APEX

[DE202004010557](#)

Flat sheet material blank for construction of hollow tetrahedral pyramid...

[KR20140011732](#)

CLOCK WISE COIL ON QUARTZ INSTALLED PYRAMID SHAPE DEVICE FOR SUBTLE ENERGY

[USD527302](#)

Pyramid for harmonizing energy

[UA18114](#)

ENERGY PYRAMID "LABIRINT"

[UA18109](#)

ENERGY PYRAMID

[RU2184574](#)

METHOD FOR TREATING PATIENTS WITH PYRAMID ENERGY

[KR20070122080](#)

APPARATUS FOR GENERATING PYRAMID ENERGY[JPS6084139](#)**PYRAMID ENERGY GENERATING APPARATUS**[JPS5786366](#)**PYRAMID-POWER DEVICE FITTED AROUND SCROTUM IN ORDER TO REINFORCE ENERGY**[JPS5424180](#)**MILK CONTAINER SERVING ALSO AS PYRAMID ENERGY GENERATOR**[JPS548055](#)**BED APPLYING PYRAMID ENERGY GENERATOR**[JPS548058](#)**PILLOW APPLYING PYRAMID ENERGY GENERATOR**[JPS55157456](#)**REGENERATIVE DEVICE AND METHOD FOR CUTLERY UTILIZING PYRAMID ENERGY COMBINED WITH MAGNETIC FORCE**[JPS59187300](#)**PYRAMID ENERGY GENERATOR**[JPS5495851](#)**PYRAMID ENERGY GENERATOR**[WO2004058339](#)**INSTRUMENT AND PROCEDURE FOR THE USE OF PYRAMID ENERGY**[EP0302192](#)**Device for the treatment of living beings and plants with pyramid energy.**[DE202006015477](#)**Energy twin-pyramid to measure cosmic and terrestrial energy has mountain crystal energy condenser**[DE202006004778](#)**Pyramid with square base containing special energy level...**[DE102005052831](#)**Gravitational energy conversion device, has pyramid produced from cuboidal stones**[DE29724691](#)**Energy pyramid for medical use**[DE19717053](#)**Energy pyramid for medical use**[CN1617188](#)**Pyramid energy focusing model and its making method**



75% troubleshoot their networks manually. Why?

Ad v

RO121993
PYRAMID-TYPE CONSTRUCTION FOR RELAXATION

Inventor(s): BECIU NICULINA

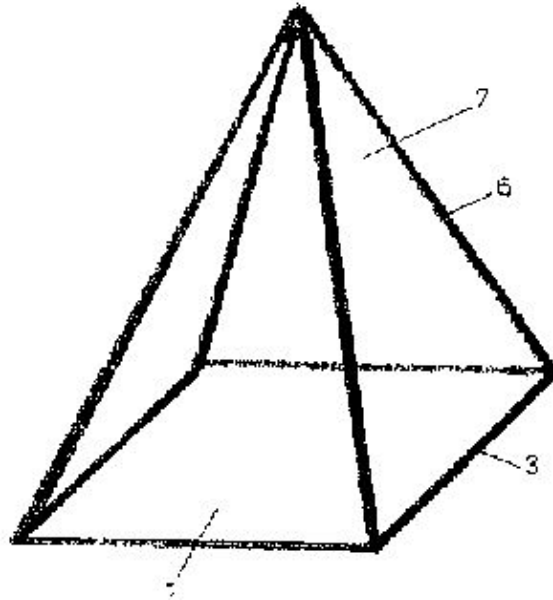


Fig. 1

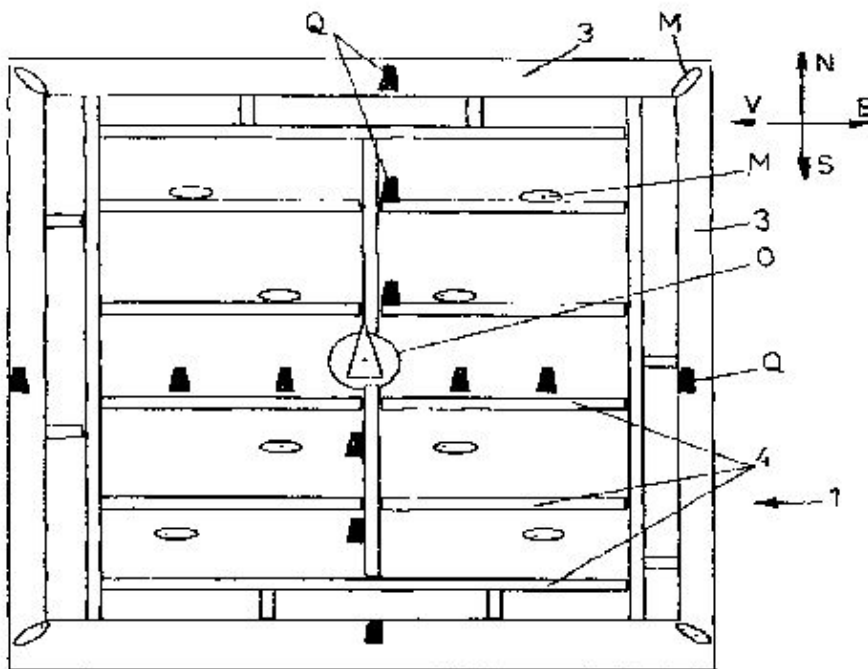
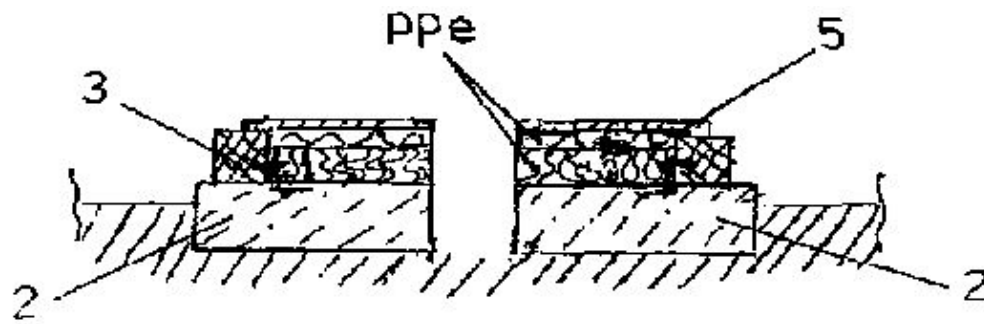
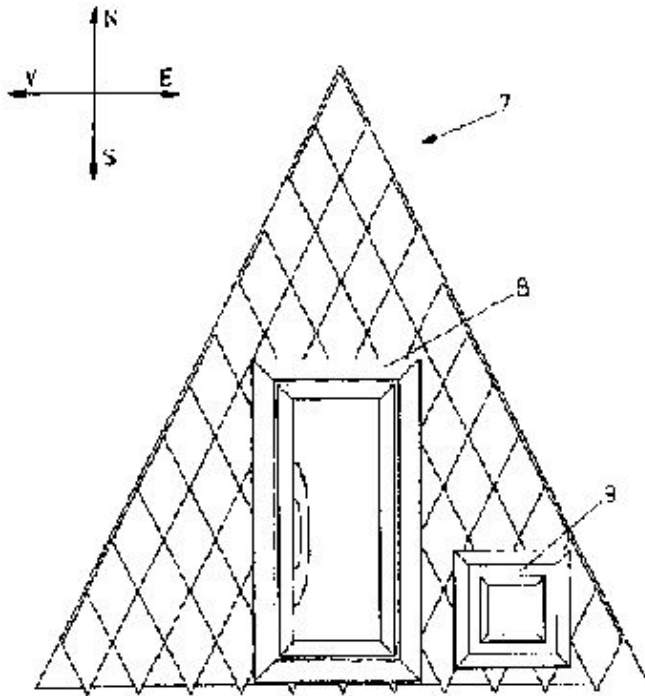


Fig. 2

**Fig. 3****Fig. 4**

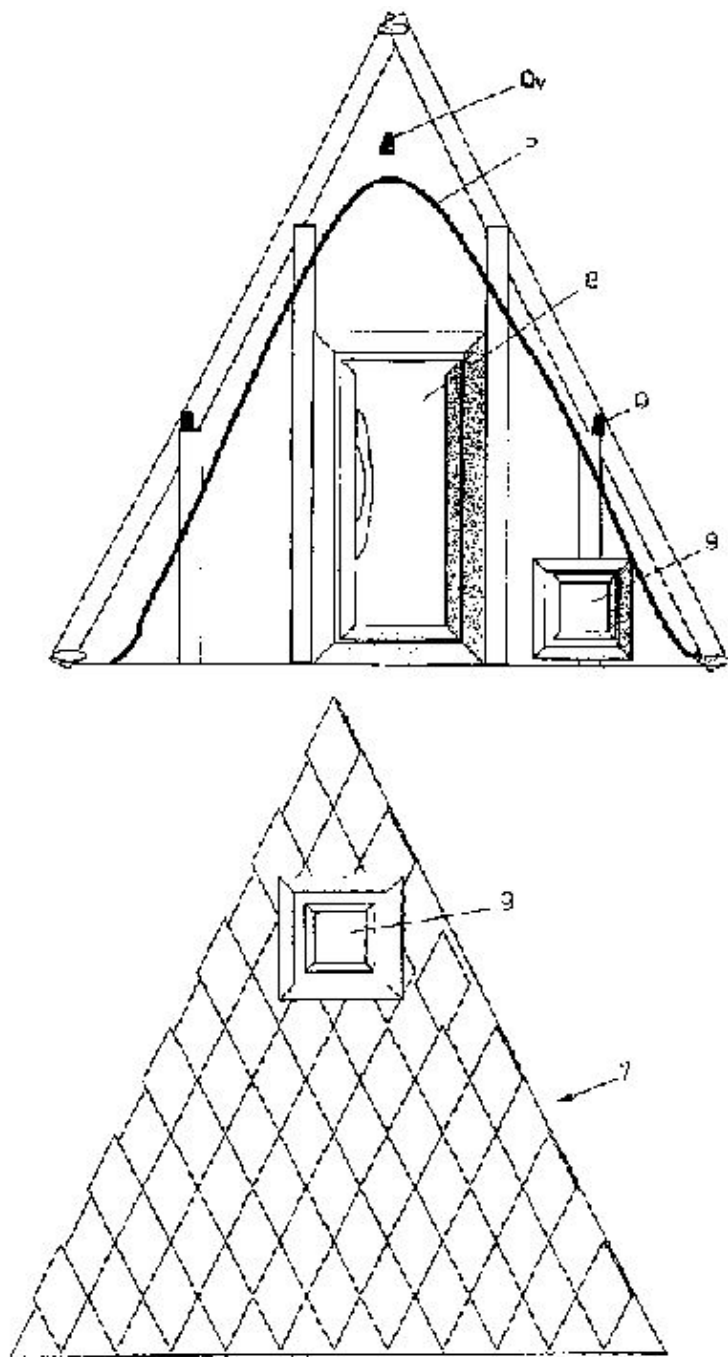


Fig. 6

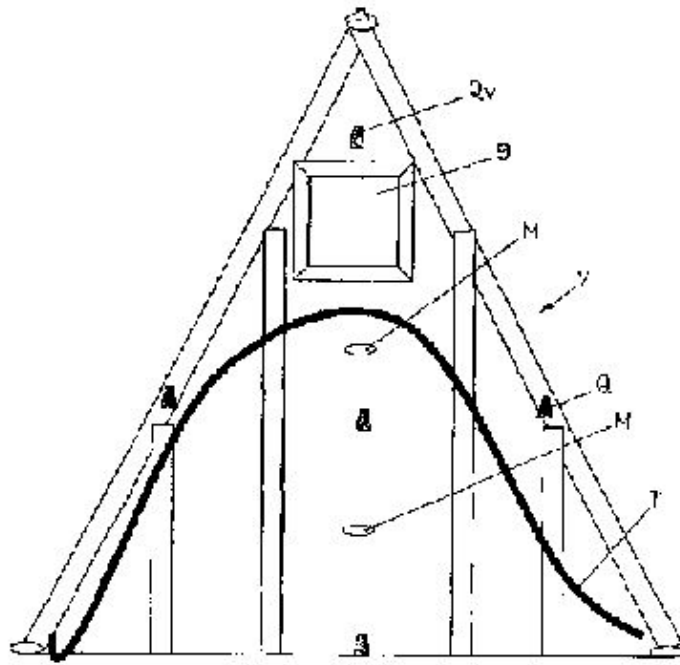


Fig. 7

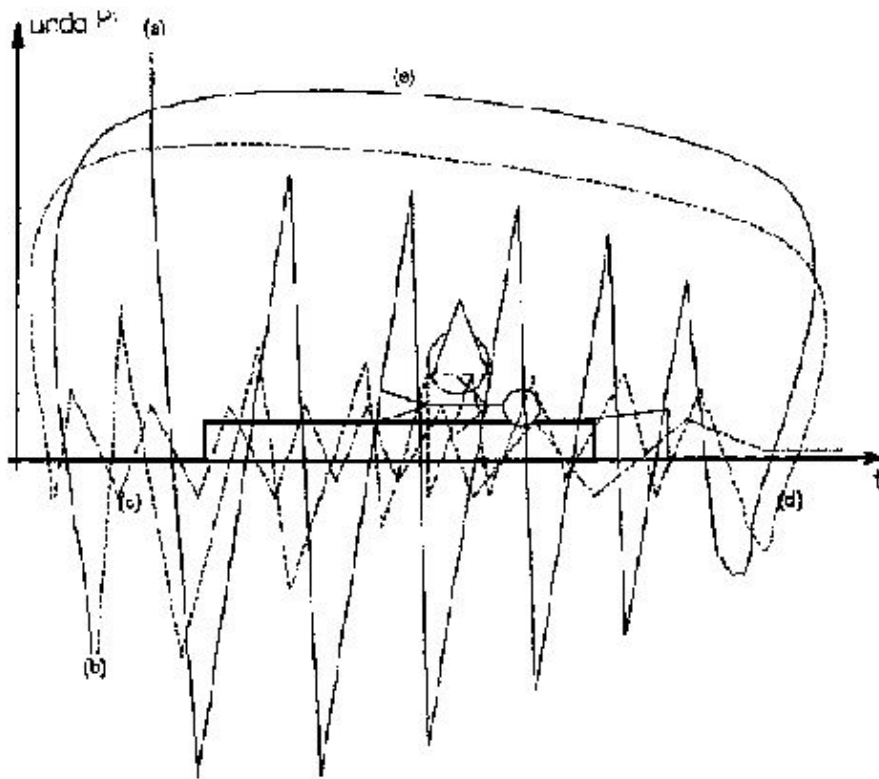


Fig. 8


The invention relates to a pyramid-type construction for body relaxation, meant to be used as therapeutical means in the field of complementary and alternative therapies. According to the invention, the pyramid-type construction for relaxation, comprising a square base and four triangular walls forming an enclosure provided with windows (9, 9', 10) and an access door (8), has multi-layered base and walls made of rigid plates with quartz crystals (Q) and permanent magnets (M) therebetween, in the base center there being placed an aluminium tube filled with consecutive layers of semi-precious stones, clay and






sand, the sand layer embedding a hexagon-shaped quartz crystal with a pointed tip oriented towards the pyramid apex, where a quartz crystal (Qv) with a downwardly-oriented tip is located, while inside the walls there is placed a multi-layer water pipe (P) with aluminium insertion, having a continuous lay-out starting from a pyramid angle and returning thereto after forming in each wall a loop reaching a height of 1/3 up to the pyramid apex, while observing the side inclination angle generating the "pi" relation between the height and the base side.

KR20040076310

STRUCTURE OF SWEATING BATHROOM USING THE PRINCIPLE OF GATHERING ENERGY IN THE FORM OF A PYRAMID AND IMPROVING ENDURANCE

Inventor(s): EOM DONG IL

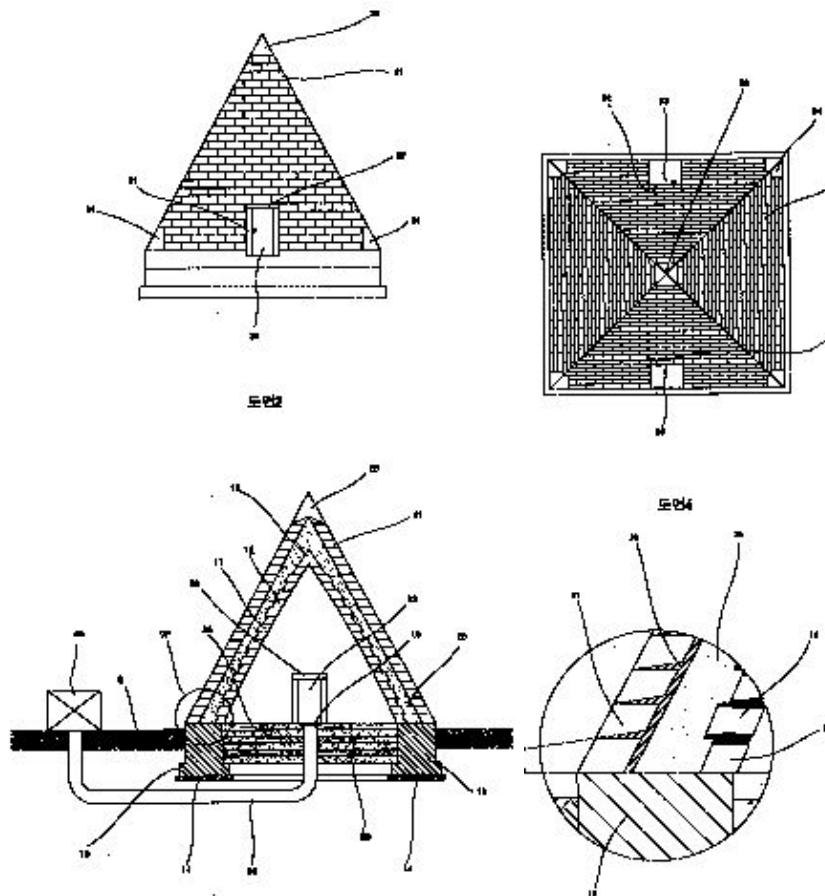

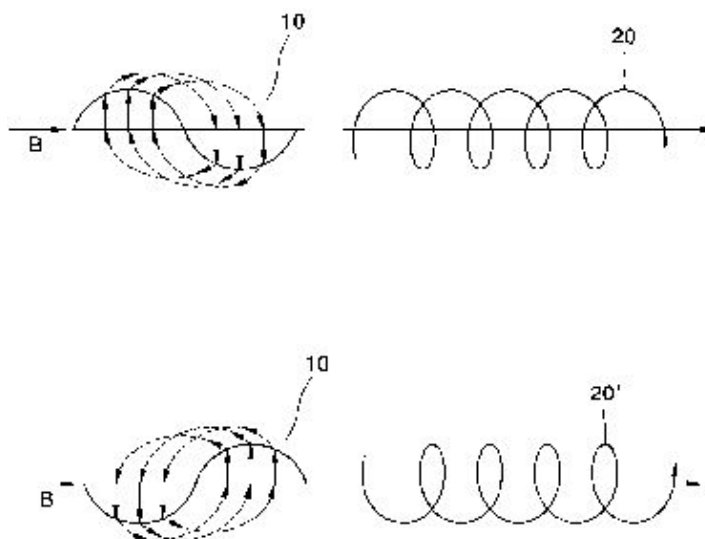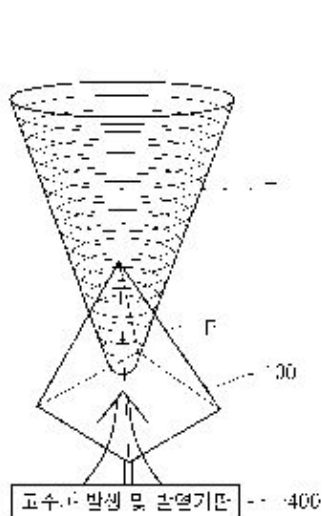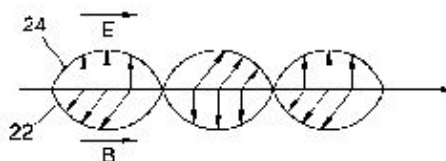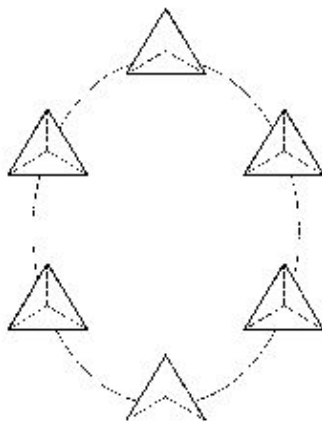

PURPOSE: Provided is a structure of a sweating bathroom to remove any inconvenience and uneasiness of a user staying in an internal space by applying the principle of gathering energy in the form of a pyramid and improving endurance; and to improve the user's health by using yellow soil in layering stone in the form of a pyramid. **CONSTITUTION:** The structure of a sweating bathroom where stone is layered in the form of a pyramid on a basis(10) and a high temperature is kept by the burning for a predetermined time comprises an inner layer block(11,12) layered for forming an inner space in the form of a pyramid; an outer layer block(21) layered for forming a predetermined space to the inner layer block(11,12); a filler(25) filled in the space in the state of combining the inner layer block(11,12) and made of yellow soil as a main material; and a floor material forming the bottom of the inside by layering a yellow soil layer(35) and a salt layer(36) alternately on the space formed by the basis(10).

RO125394
SQUARE PYRAMID-SHAPED METAL CONSTRUCTION WITH QUARTZ CRYSTALS IN THE APEX

Inventor(s): ANDRONOVICI LIVIU

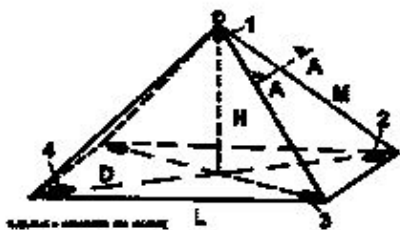


Fig. 1




Fig. 2



Fig. 3



Fig. 4



Fig. 3

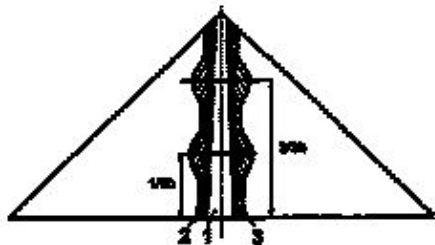
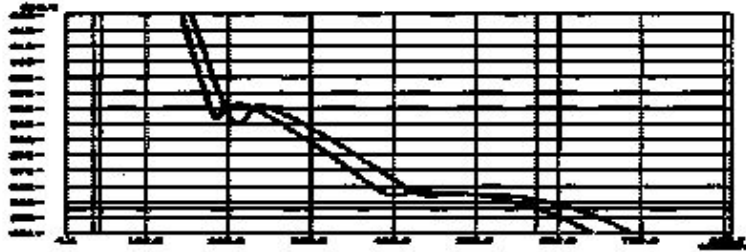
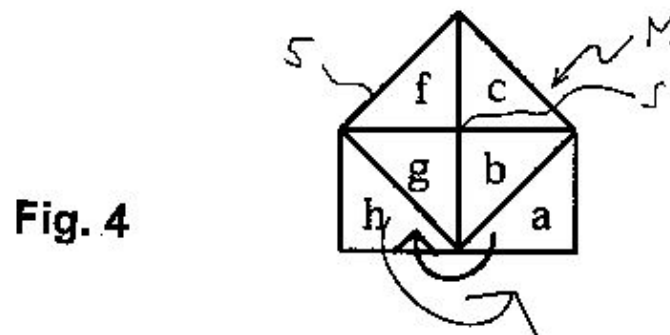
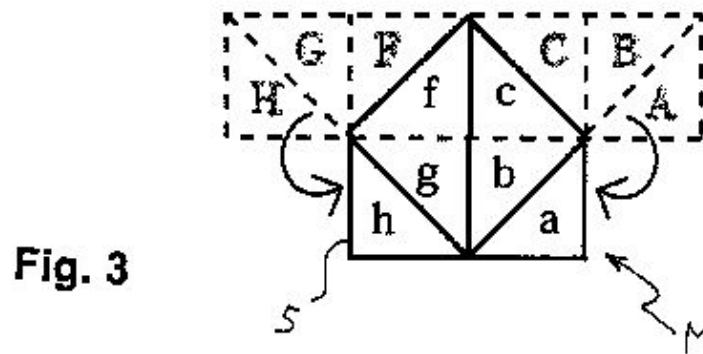
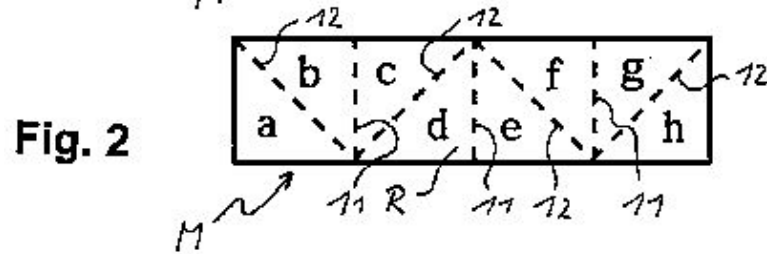
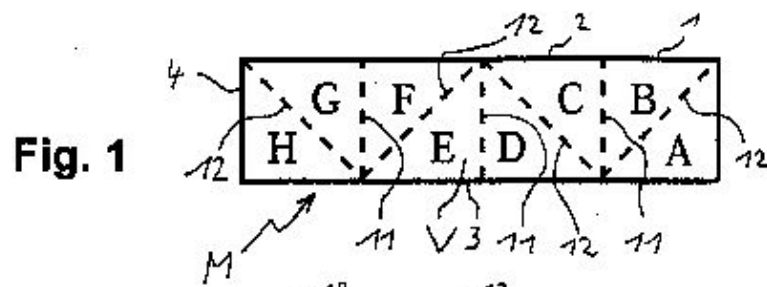


Fig. 6

**Fig. 7****Fig. 8**

DE202004010557

Flat sheet material blank for construction of hollow tetrahedral pyramid...






Fig. 5

















Fig. 6

Fig. 7



Fig. 8



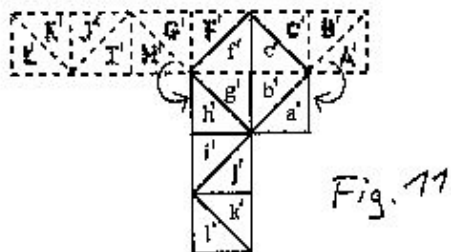

Modulvarianten




8er-Modul
Fig. 23



Flyer-Verkaufsbox 1
Fig. 24




Flyer-Verkaufsbox
Fig. 25

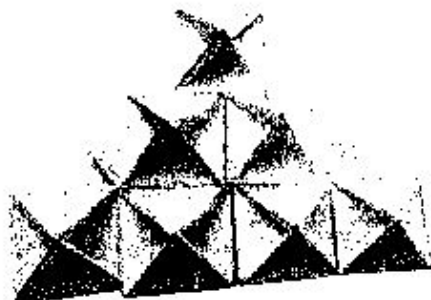

Pyramide aus 12 8er Modulen
Fig. 26



Rückansicht Pyramide
Fig. 27

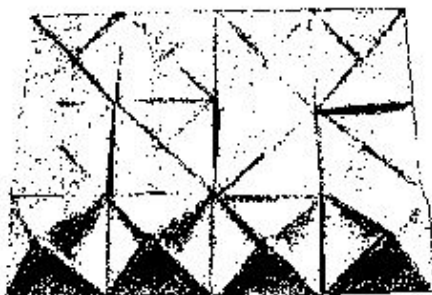

Modulwand
(untere Reihe 8er Modul, obere 4er-Modul)
Fig. 28



Säule aus 4 8er Modulen
und 1 4er Modul
Fig. 29

Inventor(s): PUPILLO ROSA MARIA et al

Some of the six triangular faces (A-H) defined on the blank (1) are folded over each other during the folding process to form a regular tetrahedron. Alternate cross-folds (11) and diagonal folds (12) define equilateral right-angle triangles with the short sides equal to the width (4) of the rectangle. The width of the rectangle is one quarter of the length (2).

KR20140011732

CLOCK WISE COIL ON QUARTZ INSTALLED PYRAMID SHAPE DEVICE FOR SUBTLE ENERGY

Inventor(s): KIM CHANG HYUN




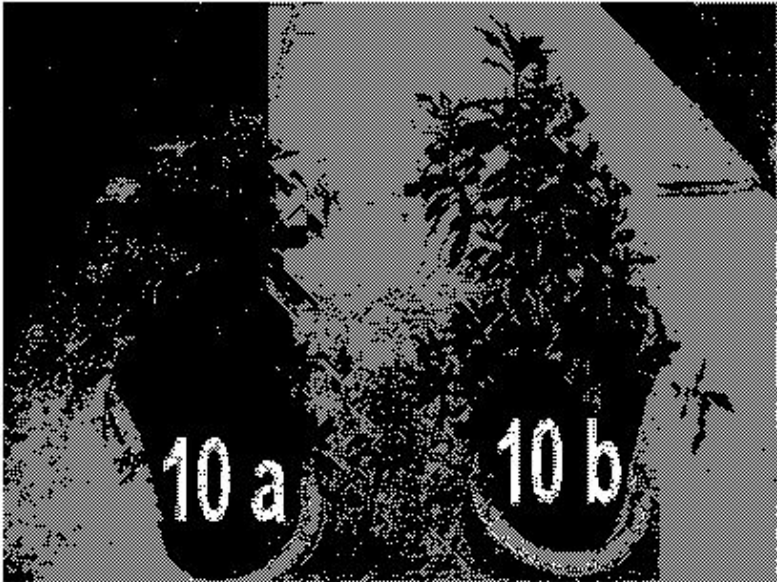


FIG. 11

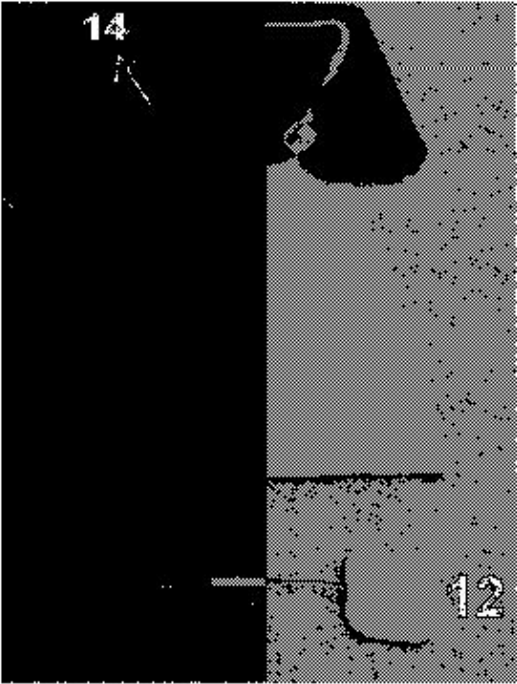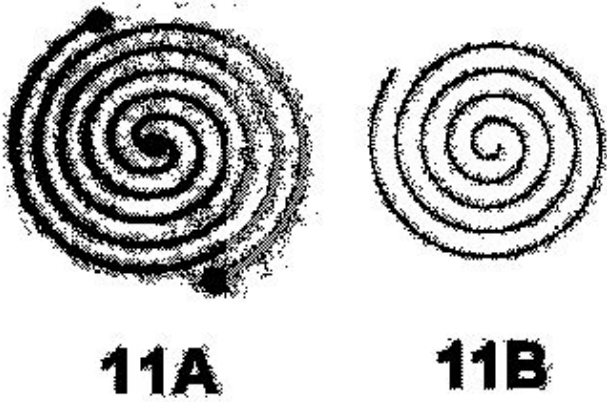

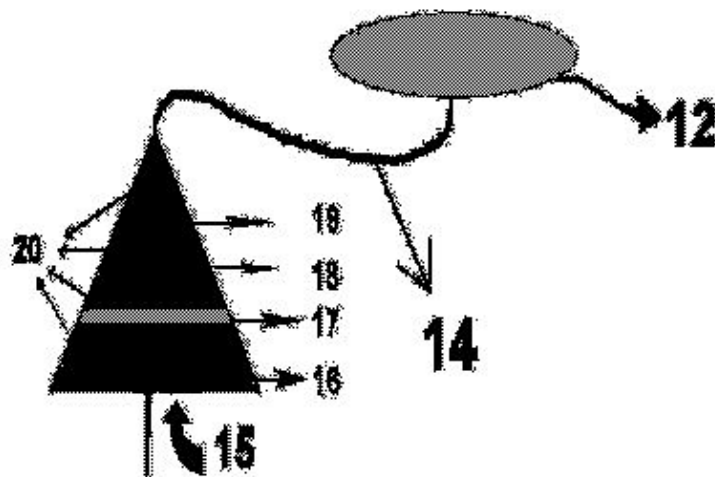

The present invention relates to a pyramid-shaped subtle energy generating device emitting scalar waves, which is characterized by winding a coil around quartz in a clockwise direction and putting the quartz into a pyramid-shaped body. The device of the present invention is configured to generate scalar waves using a scalar wave generating coil wound in the opposite direction with the same number of windings and right-handed torsion waves using a right-handed torsion coil wound clockwise starting at the center from free electrons present in a living space. The pyramid-shaped body for accumulating the free electrons is made by piling up a mixture of 50% minerals such as steel shavings, quartz shavings, brass shavings, copper shaving, etc. and 50% polyester resin into a pyramid shape to effectively accumulate the free electrons, and the accumulated free electrons pass through the coils wound the quartz to generate scalar waves and right-handed torsion waves. A drawn line is connected to the top of the pyramid-shaped body to effectively deliver the generated scalar and right-handed torsion waves to a human body. Therefore, the pyramid-shaped subtle energy generating device generates the scalar waves not using a man-made power source and provides energy beneficial to the human body.

USD527302

Pyramid for harmonizing energy

Inventor(s): VLADAMIROV STEPHAN GEORGIEV


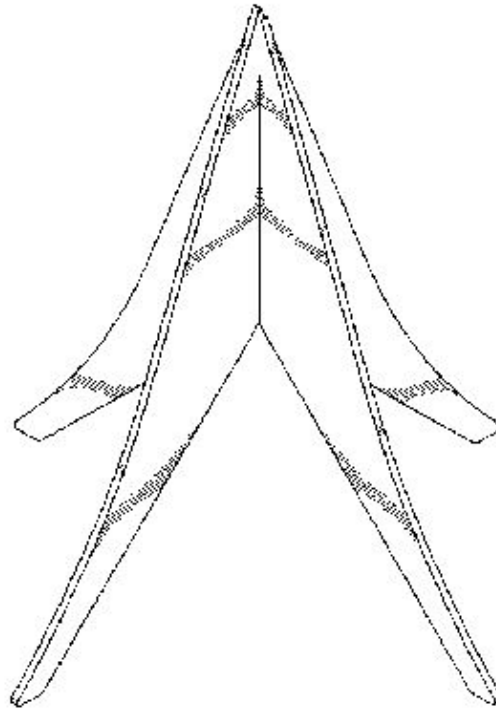


FIG. 1


UA18114
ENERGY PYRAMID "LABIRINT"

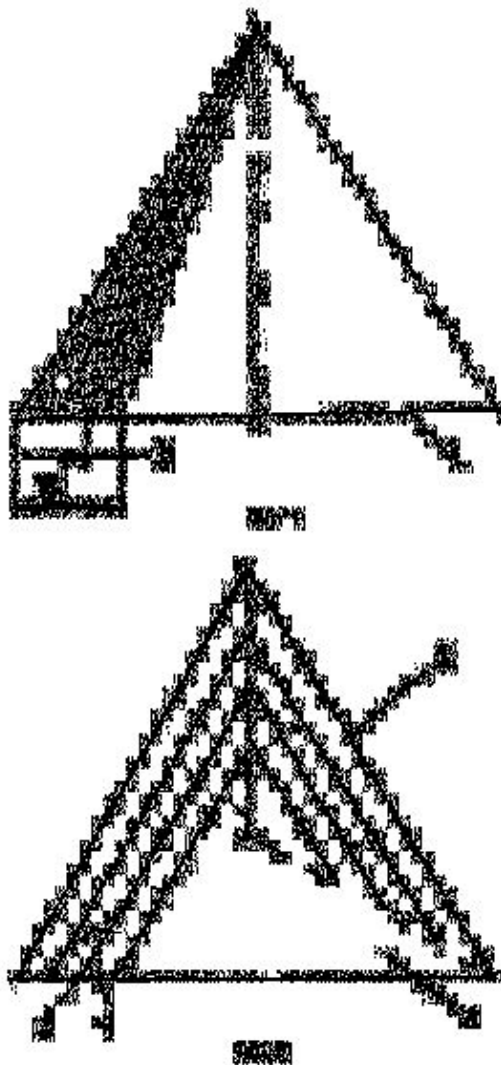

Inventor(s): YEVIENKO YURII PAVLOVYCH [UA]; HURYN VASYL ARSENTIIIOVYCH

The proposed energy pyramid has a central opening which is coupled with cavities that are separated by walls with variable profile.


**UA18109
ENERGY PYRAMID**

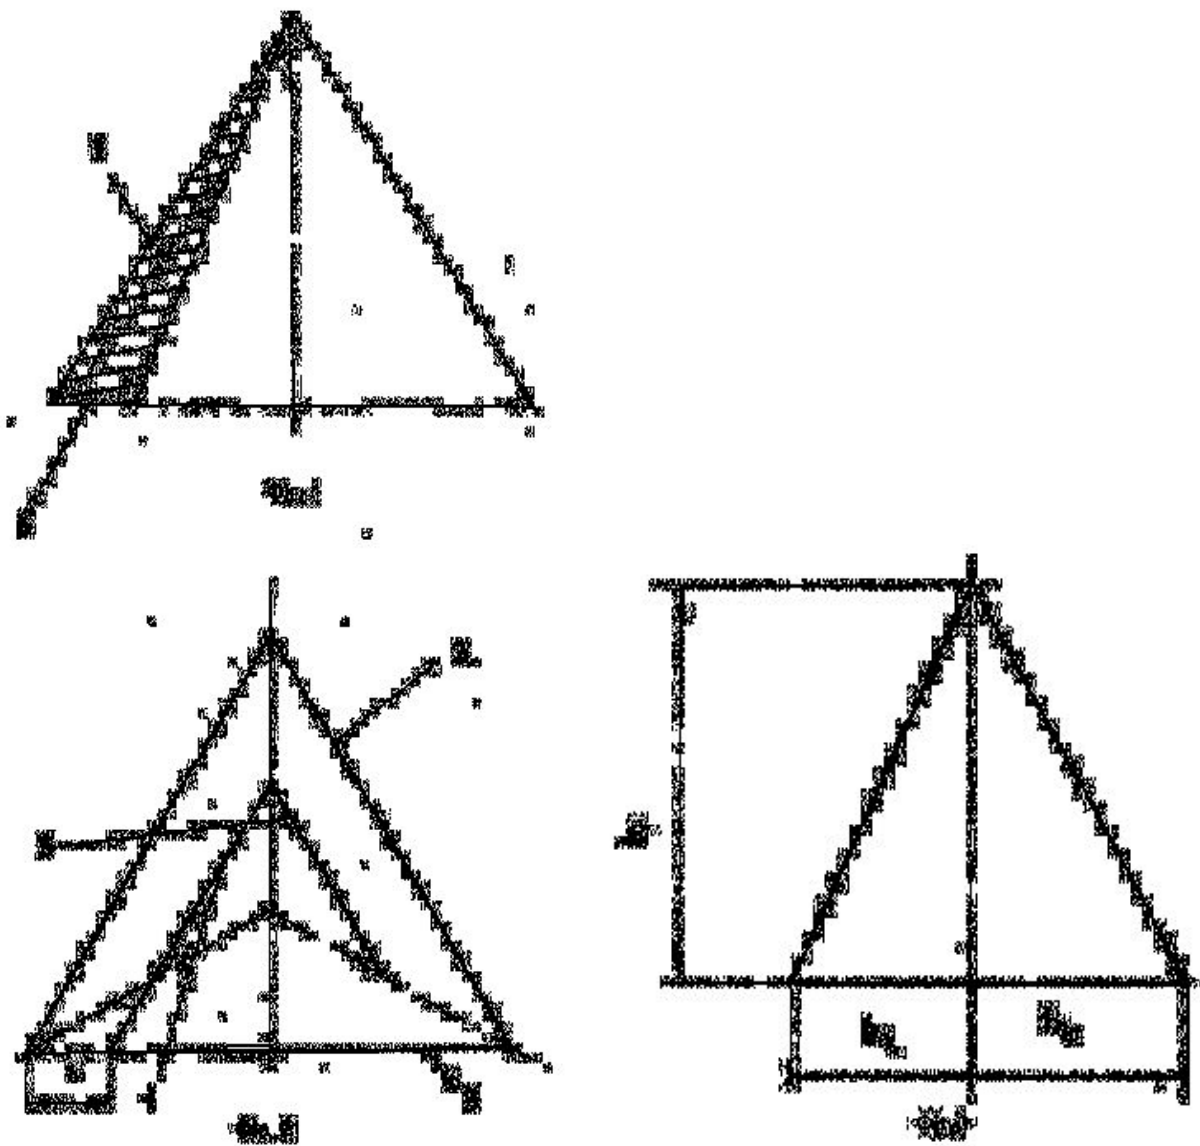

Inventor(s): YEVIENKO YURII PAVLOVYCH [UA]; HURYN VASYL ARSENTIOVYCH

The proposed energy pyramid has planar facets with spiral bases.

RU2184574
METHOD FOR TREATING PATIENTS WITH PYRAMID ENERGY



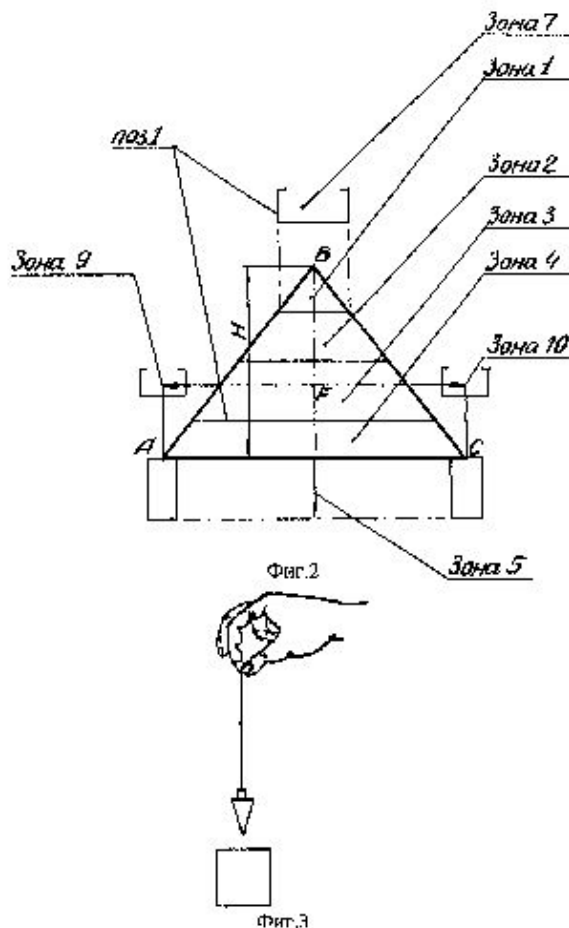


Inventor(s): PEREPELKIN I A



SUBSTANCE: method involves placing water under negative temperature in various places inside, above and under the pyramid at different heights and apart from each of the borders. Water is hold until it freezes. Filament-shaped structures are observed in frozen water to determine energy distribution zones in the pyramid and beyond its borders according to their number and length. Then patient state is examined by applying biological indicator device. Energy zone is selected in the pyramid and beyond its borders matching the patient's state. The patient or means to be used for following internal or external application are placed in this zone. The means are hold there not less than 24 h. Water is usable as internal application means, foil, stones, copper and bed cloths are usable as external application means. EFFECT: enhanced effectiveness of catheter protection against moisture with no sticking effects. 4 cl, 3 dwg






KR20070122080

APPARATUS FOR GENERATING PYRAMID ENERGY USING PYRAMID STRUCTURE

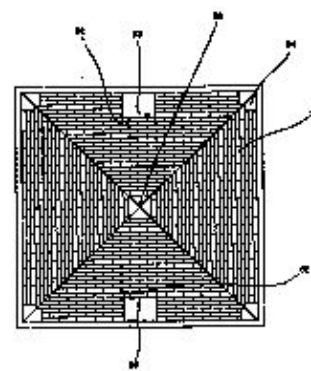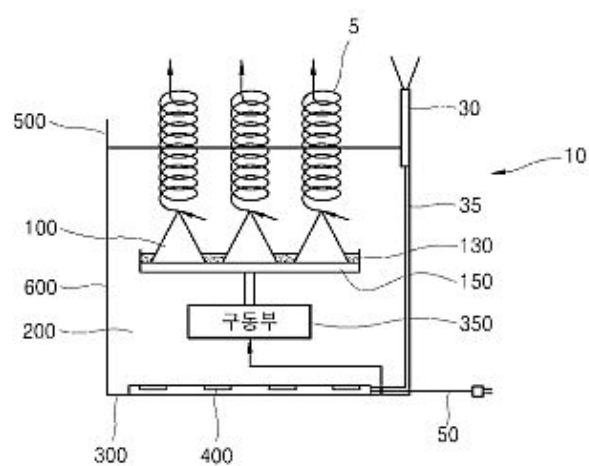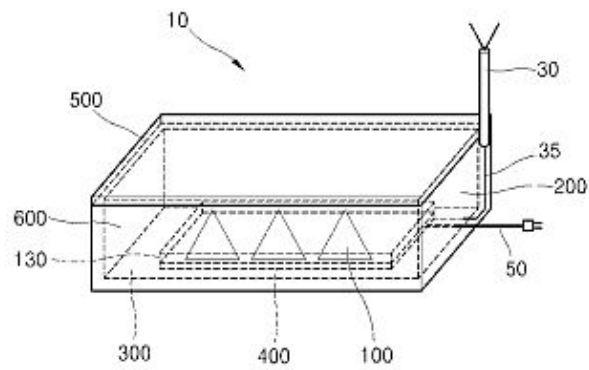

도면4

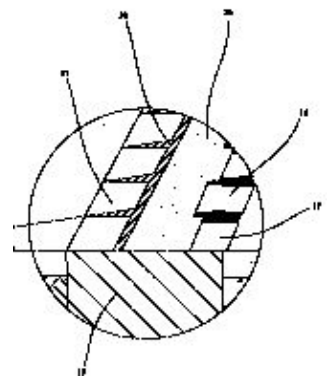

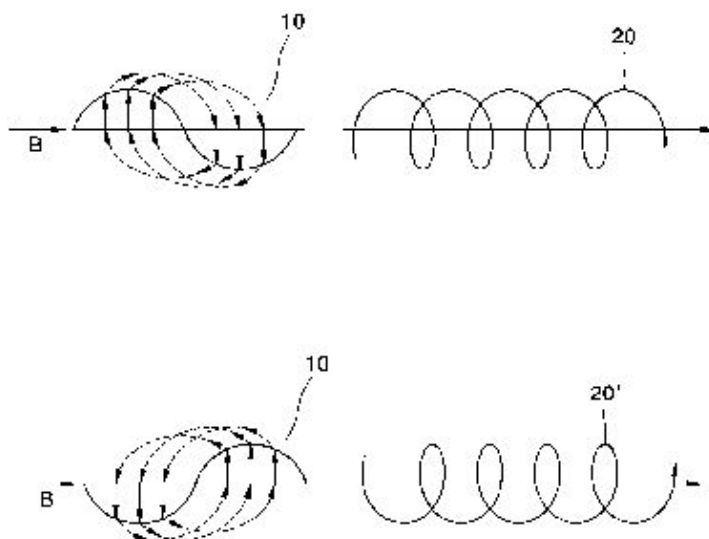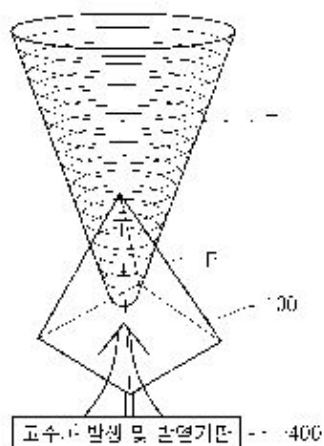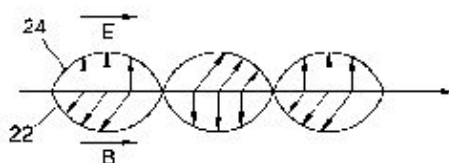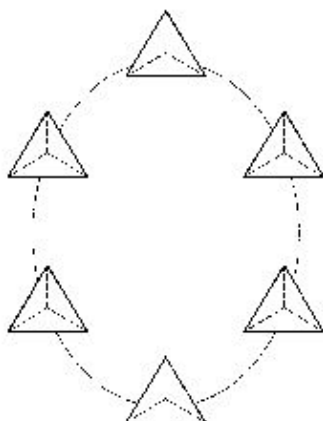


Inventor(s): I YEONG GYU [KR]; NRHO BYUNG

An energy generating device using a pyramid structure is provided to amplify pyramid energy of the pyramid structure by changing a magnetic field by applying high frequency to the pyramid structure. An energy generating device(10) generating pyramid energy in a pyramid structure(100) is composed of the pyramid energy generating pyramid structure; a case(200) containing the pyramid structure; a high frequency generating and heating substrate(400) installed at the inner bottom of the case and operated electrically or magnetically by receiving electricity from an external power source, in order to generate a high frequency signal and heat and amplify pyramid energy generated from the pyramid structure; and an object holder(500) formed at the outer upper part of the case to place an object and absorb pyramid

energy generated from the pyramid structure stored in the case.

JPS6084139
PYRAMID ENERGY GENERATING APPARATUS


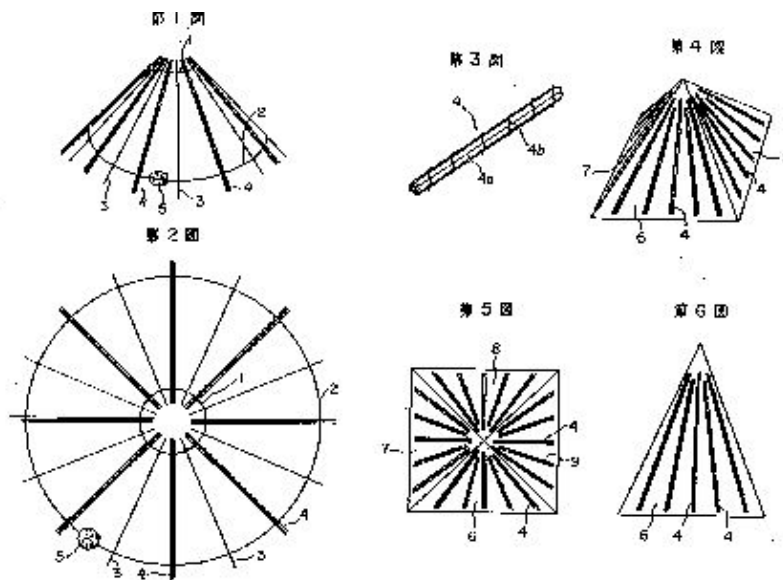


Inventor(s): WATANABE NAOMICHI

PURPOSE: To provide an apparatus for generating strong pyramid energy regardless of azimuth, obtained by arranging a wire member and a composite body of the wire members along a secondary curved surface. **CONSTITUTION:** A large number of single wire members 3 and composite bodies 4 of the wire members are connected to a ring shaped upper support member 1 and a ring shaped lower support member 2 and the single wire members 3 and the composite bodies 4 are arranged along a conical surface. Furthermore, a metal or bamboo material is appropriately used as each single wire member. In addition, when the pole of a magnet 5 is contacted with the lower support member 2, the radiation direction of pyramid energy can be bundled to a lower direction. This generation apparatus always generates a large amount of strong pyramid energy even if directed to any direction and excellent in dehydration effect or corrosion preventing effect.



JPS5786366
PYRAMID-POWER DEVICE FITTED AROUND SCROTUM IN ORDER TO REINFORCE ENERGY

Inventor(s): MAGATA YASUHEI




JPS5424180
MILK CONTAINER SERVING ALSO AS PYRAMID ENERGY GENERATOR

Inventor(s): SANO KATSUO




JPS548055
BED APPLYING PYRAMID ENERGY GENERATOR

Inventor(s): SANO KATSUO




第 2 圖



JPS548058
PILLOW APPLYING PYRAMID ENERGY GENERATOR


Inventor(s): SANO KATSUO



第 2 圖



JPS55157456
**REGENERATIVE DEVICE AND METHOD FOR CUTLERY UTILIZING PYRAMID ENERGY
 COMBINED WITH MAGNETIC FORCE**

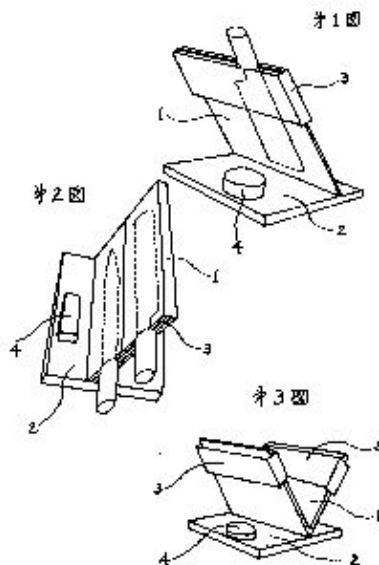


Inventor(s): OOHASHI TATSUNORI


PURPOSE:To increase pyramid energy power and regenerate cutlery in a shorter period, by fitting a cutlery holder with a certain angle of elevation to a base plate equipped with a magnet in the magnetic north. CONSTITUTION:A cutlery holder 1 is fixed with about 60 deg. of elevation on a base plate 2 and a magnet 4 is also fixed in the magnetic north on the plate 1 to increase the magnetic force in the cardinal direction of north. This can reinforce energy power working in other three cardinal directions and regenerate cutlery set to the holder 1 equipped with a supporting frame 3 in about a week.

JPS59187300
PYRAMID ENERGY GENERATOR

Inventor(s): WATANABE NAOMICHI

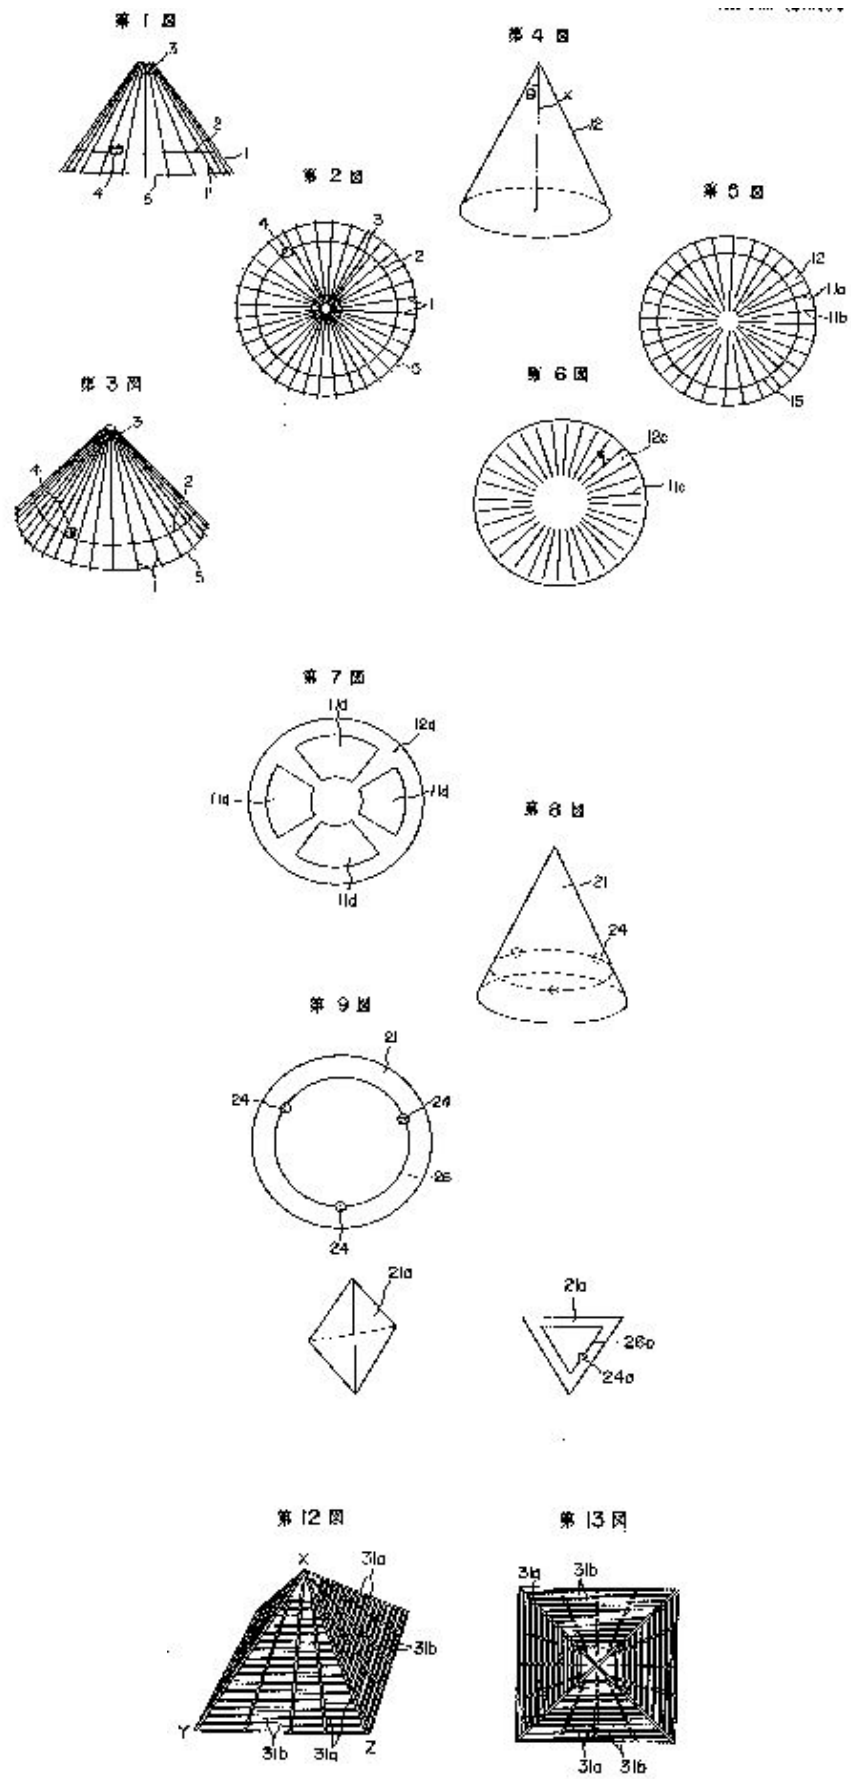

Inventor(s): SANO KATSUO

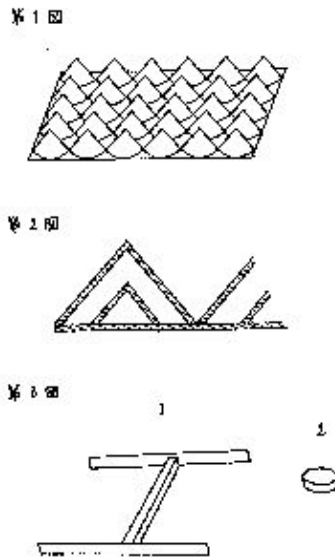

WO2004058339

INSTRUMENT AND PROCEDURE FOR THE USE OF PYRAMID ENERGY

Inventor(s): CSAPO GYOERGY [HU]; CSAPO GYOERGYNE

The subject of the invention is on the one hand an instrument for the use of pyramid energy, which consists of a carrier of any substance and square based pyramidal bodies arranged on the carrier, characterized by the spiral arrangement of the pyramidal bodies on the carrier, the multiple spiral formations arranged into a spiral system originating from multiple points close to each other on the carrier, and by the defined manner in which the size of the pyramidal bodies decreases within a spiral formation. The spiral formations of the instrument according to the invention follow the Fibonacci Principle. The subject of the invention is also a procedure using the device above for the use of pyramid energy, characterized by placing the pyramid energy-enhancing instrument above or below the substance to be treated - ideally water or substance containing water - in a way that the top vertices of the pyramidal bodies arranged on the carrier point towards the substance to be treated, and carrying on with the treatment for the desired time. The substance containing water may ideally be the human body, tea, fruits, fruit juices, etc.

The instrument and procedure for use of pyramid-energy The subject of the invention is an instrument and procedure for the use of pyramid energy.

The energy concentrating effect of pyramids has long been known.

Such is, for example, **Czechoslovakian patent Na 91304** which describes that a razor blade is repeatedly resharpened in a pyramid shaped housing and is reusable hundreds of times.

According to the currently accepted supposition the common resultant of cosmic space, terrestrial space, electric, magnetic, corpuscular, and other, thus far unknown particles and energies could be responsible for phenomena taking place in pyramid shaped spaces.

German patent Na 3525521 gives directions as to the formation and placement of the pyramid. The pyramid is fashioned of a material with a high dielectric constant to the reduced size of the Cheops pyramid.

German patent Na 19717053 describes an energy pyramid for therapeutic purposes. A number of pyramids according to the patent are placed on different points of the body to achieve the desired remedial effect. The pyramids may be 3-5 sided, with edge lengths between 1-10 cm, and may be made of aluminum or its alloys.

Japanese patent Na 9313624 proposes the use of reduced size Cheops pyramids with a plane inclination angle of 68-25 degrees for destroying infecting bacteria, viri and fungi, and curing joint and muscle pains.

According to the view currently held by researchers energy travel downwards in the pyramid in a spiral from the top vertex. According to suppositions this spiral movement lends special properties to pyramidal shapes. Spiral movements found in nature are characterized by the Fibonacci spiral model. (For example the expansion of an explosion, a spiraling galaxy also works according to the Fibonacci Principle.) The aim during the elaboration of our invention was to allow for a much more widespread and general use of pyramid energy than before.

We have recognized that a great number of pyramidal shapes arranged according to the Fibonacci Principle allow for the use of the inner energy of pyramids with greater efficacy. In a formation thus constructed energies flowing upward also exercise their effects according to the Fibonacci spiral formation, their effect is multiplied (not simply added up).

Our further research has shown that if the pyramidal shapes we arranged in a spiral are not of equal size, rather they differ in size in an orderly manner along each spiral arm, the energy concentration that can be achieved is larger than before by up to two magnitudes.

The subject of the invention is on the one hand an instrument according to the above for the use of pyramid energy, which consists of a carrier of any substance and square based

pyramidal bodies arranged on the carrier, characterized by the spiral arrangement of the pyramidal bodies on the carrier, the multiple spiral formations arranged into a spiral system originating from multiple points close to each other on the carrier, and by the defined manner in which the size of the pyramidal bodies decreases within a spiral formation.

The spiral formations of the instrument according to the invention follow the Fibonacci Principle; the number of spirals on a carrier is between 3-21.

The instrument according to the invention may be made of any formable or afterhardening material, ideally rubber, plastic, metal, paper, concrete, gypsum or epoxy. Metal may ideally be copper.

The instrument may naturally be made with spirals formed clockwise or counter-clockwise, which correspond to carrying positive or negative energy/Ying and Yang/.

A ring shaped body made of metal and/or magnetic rods with high field intensity and/or stones (e. g. crystals) may be positioned inside the pyramidal bodies constituting the spiral arms.

Experience suggests that this also increases the energy level of the device.

The pyramidal bodies may be fixed to the carrier by gluing or using detachable jointing, or they may be formed together with the carrier by vacuum-forming plastic or machining metal.

The subject of the invention is also a procedure using the device above for the use of pyramid energy, characterized by placing the pyramid energy-enhancing instrument above or below the substance to be treated-ideally water or substance containing water-in a way that the top vertices of the pyramidal bodies arranged on the carrier point towards the substance to be treated, and carrying on with the treatment for the desired time.

While carrying out the procedure according to the invention it may be expedient to rotate the instrument around its center of symmetry.

The substance containing water may ideally be the human body, tea, fruits, fruit juices, etc.

Substance containing water thus treated may be used for treating human and animal sicknesses. The instrument and procedure according to the invention is also suited to set the satisfactory energy level of the human body.

The instrument according to the invention may be formulated so that it is set on a shoe sole shaped carrier.

The color of the instrument according to the invention may diverse/ideally according to the seven chakra colors/.

The formation of the instrument according to the invention is presented in Figures 1-9 as an example.

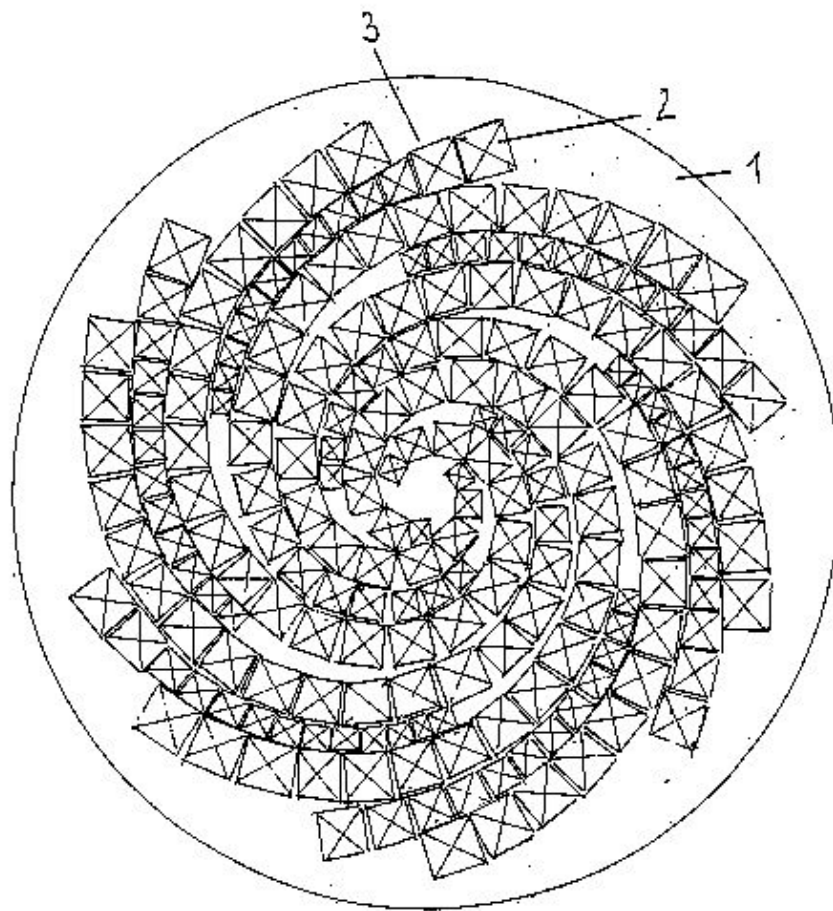


fig 1

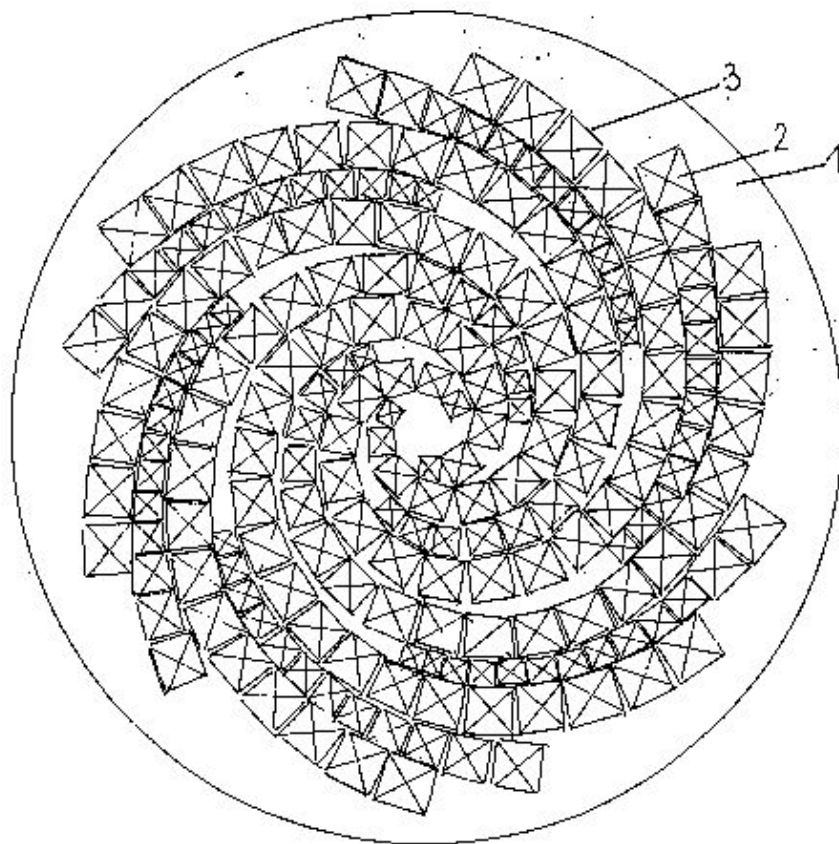


fig 2

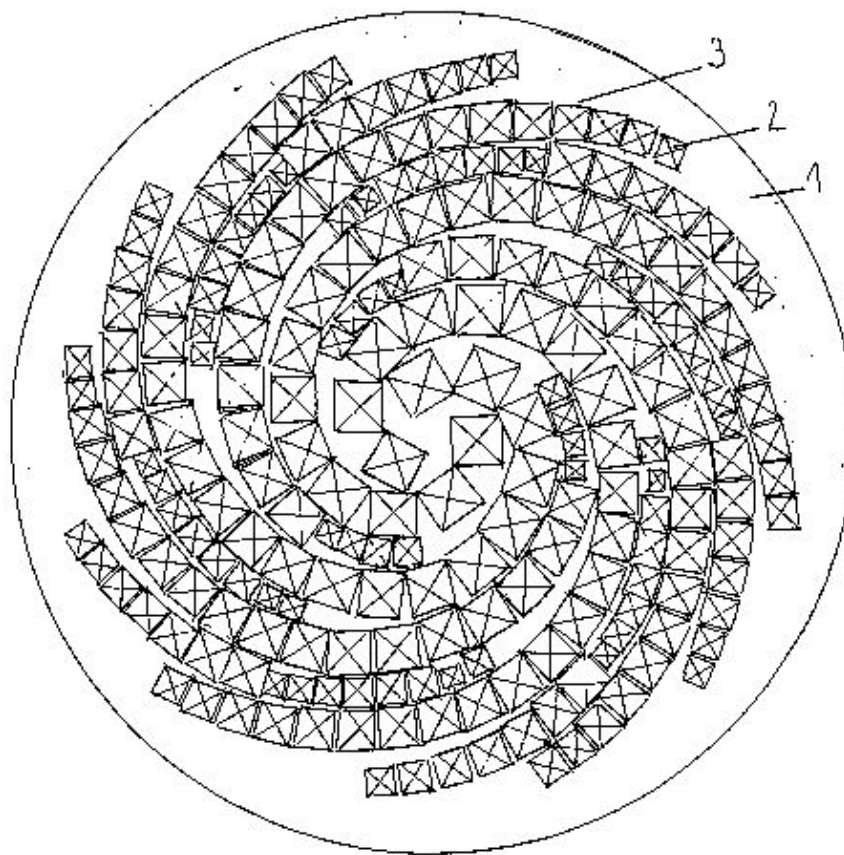
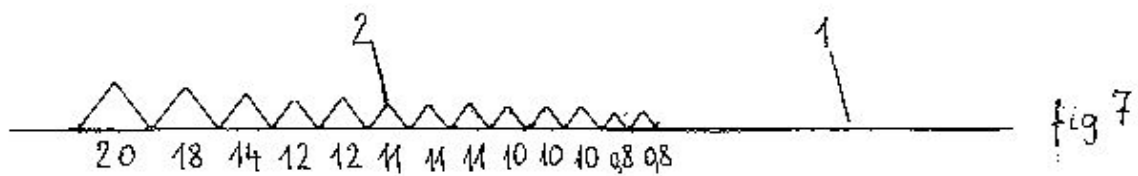
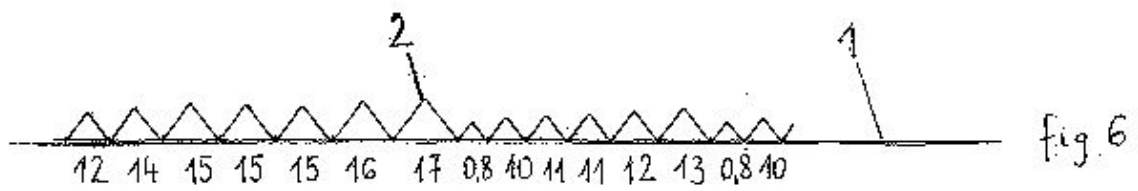
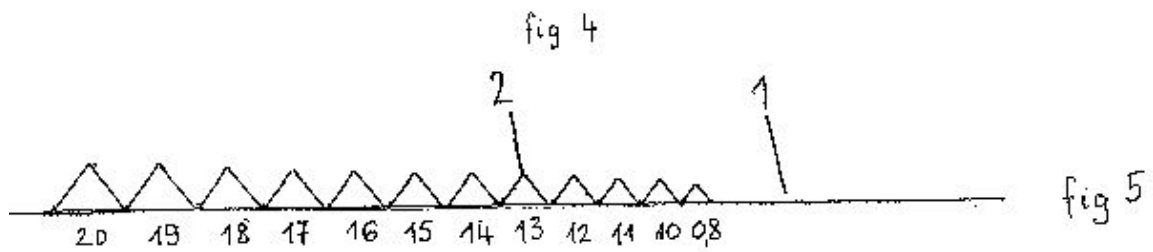
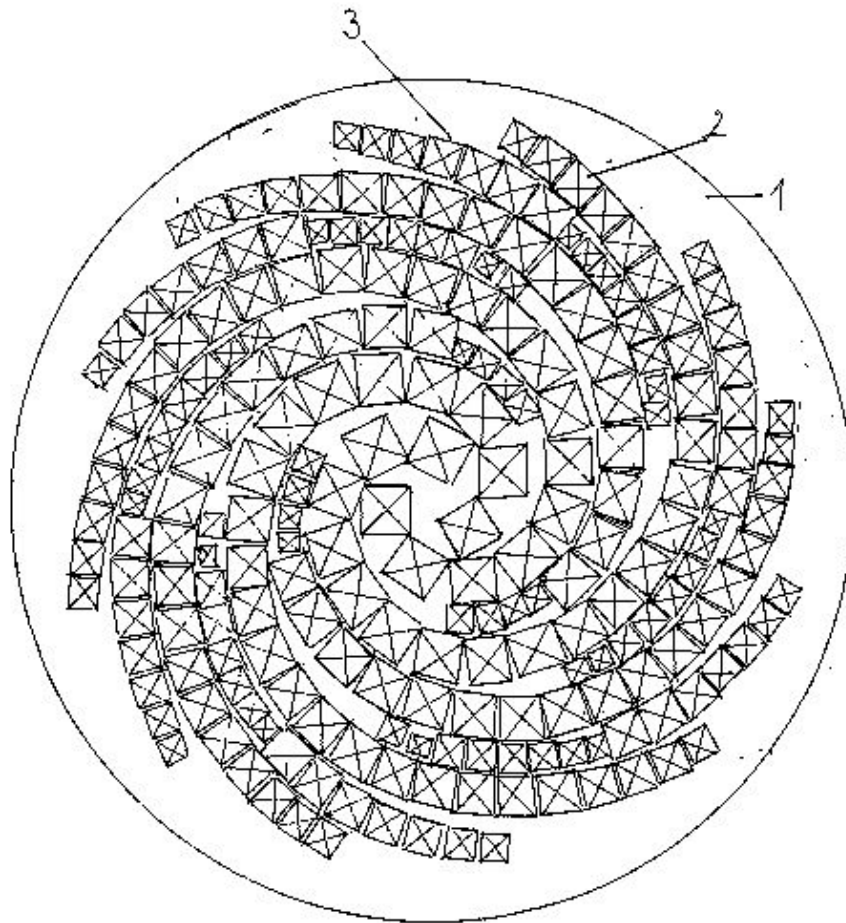


fig 3



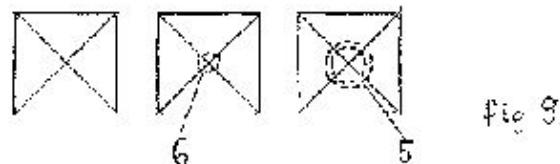
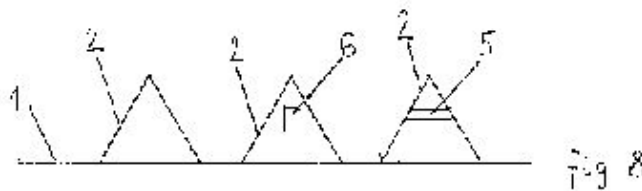


Figure 1 shows the instrument according to the invention fashioned so that the pyramidal bodies/2/gradually increase in size from the originating point along the spiral arms 131.

- This is presented as a section in Figure 5.

Figure 2 shows the instrument in Figure 1 with an opposite direction of rotation.

Figure 3 shows a formation where the pyramidal bodies/2/in the spiral arms 131 alternate in increasing from a smaller size toward a larger size and decreasing from a larger size toward a smaller size.

- This is presented as a section in Figure 6.

Figure 4 shows a formation where they increase from a smaller size toward a larger size, then decrease from a larger size toward a smaller size, with the same repeating in the opposite direction on a neighboring spiral arm.

- This is presented as a section in Figure 7.

Figure 8 shows the ring made of metal 151 and the strong permanent magnet/6/to be placed inside the pyramid as a section.

- The same is shown in a top view in Figure 9.

EP0302192

Device for the treatment of living beings and plants with pyramid energy.

Inventor(s): OEHME RAINER


In a device for the treatment of living beings and plants with pyramidal energy, the energy is picked up on energy pick-up lines (12, 13), which are arranged electrically separate along the four edges of the pyramid (6). Since the emission of energy is particularly strong along the pyramid edges, a particularly large amount of energy can be picked up by energy pick-up lines (12, 13) of this type. Such energy pick-up lines (12, 13) are considerably cheaper to produce.

DE202006015477

Energy twin-pyramid to measure cosmic and terrestrial energy has mountain crystal energy condenser

Inventor(s): GROTHOFF HEINZ HUBERT

An energy double-pyramid with mountain rock crystal energy condenser has two discrete, independent pyramid bases (1, 2) without an electro-galvanic link.

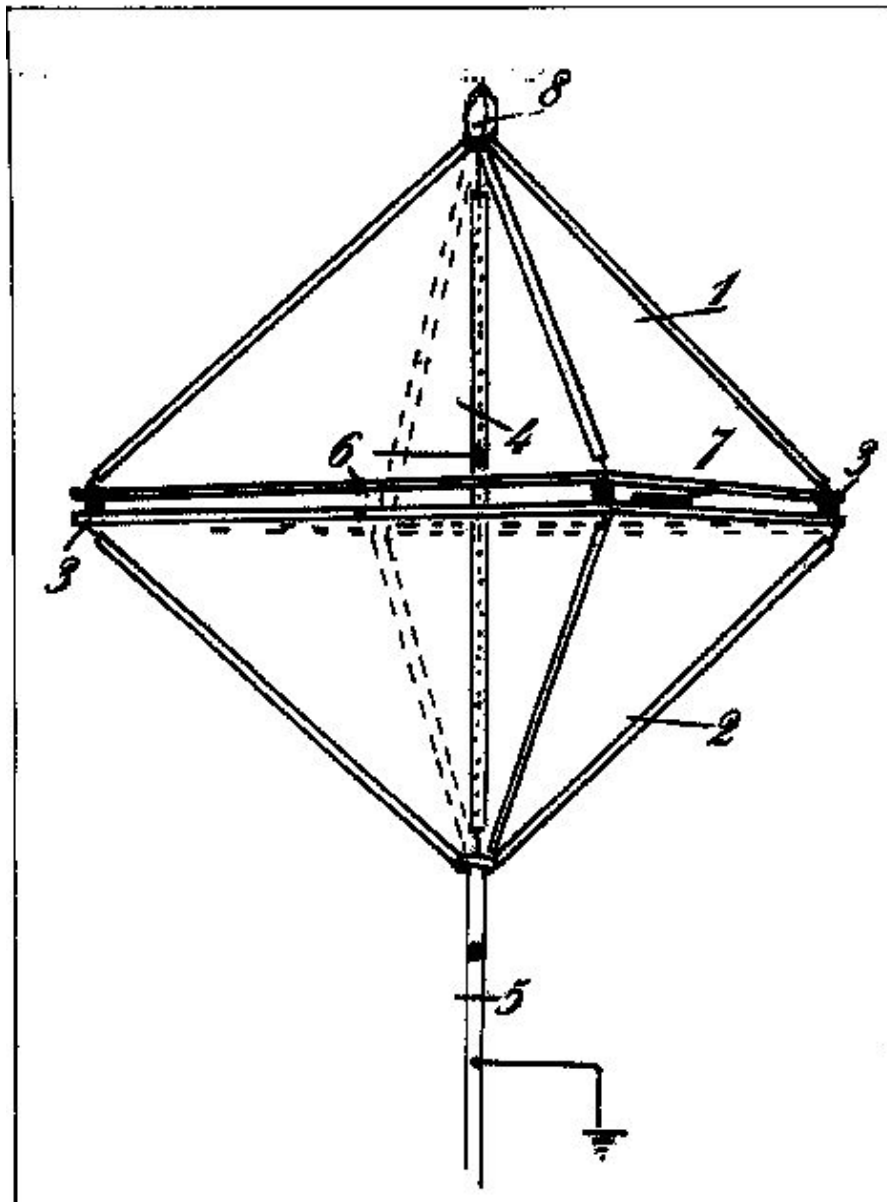

A separation and measurement of terrestrial and cosmic energy is therefore not possible.

The protection specified in claim 1 invention has the object to produce such a single measurement of cosmic and terrestrial energy on the creation of an energy-double pyramid of metals of all kinds and sizes. This problem is solved with the features listed in the protection Claims 1 to 6.

With the invention ensures that a flow of energy in the mV range can be detected by the mechanical connection of the individual pyramids, but with electro-galvanic separation of the two basic structures of individual measuring points with plug and socket with electronic measuring instruments.

This both the kosmischenals on the terrestrial side of the two pyramids.

The finely-energy portion of the energy is dissipated in the so-called energy capacitor, with a brief break in rock crystals of 1-3 cm diameter filled plexiglass tube, this energy capacitor is mounted in the inner tips of the two pyramids.

Also on energy capacitor has a socket for tapping the energy is applied.

At the intersection of the two pyramids a plate for placing objects attached to energize.

The overall design is then on the top of the lower pyramid.

At the apex of the upper pyramid a natural quartz crystal is attached.

The bulk of the energy-double pyramid always correspond to a reduction corresponding to the masses of the Cheops pyramid.

Over the two sockets but also the electrical connection between the two pyramids is possible and the result is a big power cage.

The final energy double pyramid is shown in the protection claim 1 in the image and in the drawing.

1: upper pyramid base 1

2: lower pyramid base 2

3: 4 insulators

4: Rhinestone energy capacitor

5: grounded standpipe

6 sockets


7: Storage Plates

8: rock crystal tip

DE202006004778

Pyramid with square base containing special energy level...

Inventor(s): NOWACK REINHARD

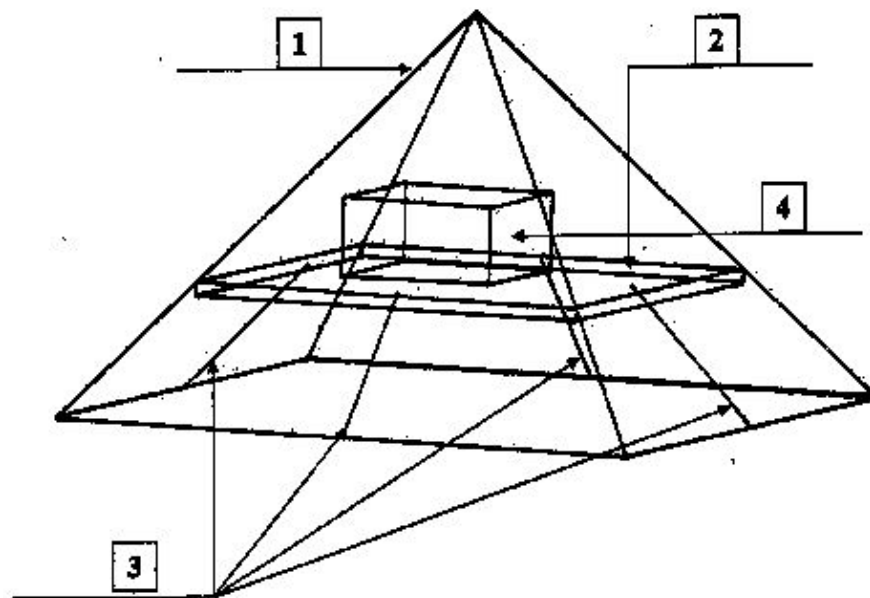

The focusing bars (3) serve as a holder for the energy platform (2), whilst simultaneously focusing energy on the object (4) to be energized.

DE102005052831

Gravitational energy conversion device, has pyramid produced from cuboidal stones...

Inventor(s): HUBER KLEMENS

The device has a pyramid used with a quadratic base surface of a side length and a vertical height (hy) in a center. The pyramid is produced from cuboidal stones, where a cuboidal-shaped hollow space is designed with volume (V1) in the pyramid. A well-shaped hollow body is designed with outer volume and inner volume in the pyramid. The hollow body is adjusted on the volume, such that the electrical

energy that is provided in the hollow body is converted into gravitational energy.

The invention relates to a device with a pyramid according to the preamble of claim 1.

A variety of such pyramids there are on earth.

Their intended purpose and their age are controversial among archaeologists and researchers pyramid.

State of the art

The starting point of the present invention is to **DE 42 33 678 A1**.

There, the oscillation energy of an electron is equated with its electrostatic energy ECOUL.

Conversion factor is the Sommerfeld fine structure constant $[\alpha]$.

In the resonant energy product $[\omega]$ is 1 \propto V1 contain.

The part of the electron volume V1 is determined from the known angular frequency $[\omega]$ 1 and other known factors.

In the second equation, the product $[\omega]$ 2 \propto V1 appears; is the angular frequency $[\omega]$ 2 is calculated from known V1 and other factors.

The invention is now expected that applies to energy transfer between two bodies with the volume V3 and V4: $[\omega]$ 3 \propto V3 = $[\omega]$ 4 \propto V4

Harmonious relationships exist when V3 and V4 and $[\omega]$ 3 \propto and $[\omega]$ 4 \propto primes or prime products.

So there is a certain extent square harmony.

In contrast, the sound frequencies f of the music and its scales are linear or numbers

Number quotients dependent.

Task

It is the object of the invention to convert gravitational energy directly into electrical energy.

To achieve this objective the characterizing features of claim 1.

To explain is to serve subsequent calculation.


To achieve this objective the characterizing features of claim 1.

To explain is to serve subsequent calculation.

If the Earth rotates daily on its axis, acting on the electrons of a pyramid built on her a

Coriolisbeschleunigung acor the size acor = 2 wrel $[\omega]$ S


$[\Omega]$ S = angular velocity of the solar system sphere

 id = "027964757-00020001" />


RES = mean distance Earth - Sun

RES = 1.495921 10 ¹¹ m


wrel = relative velocity of the earth to the sun sphere

 id = "027964757-00020002" />

From this:

 id = "027964757-00020003" />

where for the determination of the rE relationship:

 id = "027964757-00020004" />

And hy ³ according to claim 1: hy ³ = 9 X 11 X 29 X 37 X 299 521 X 10 ⁻⁴ m ³


On the electrons then the moment acts:

Dcor = acor me RB

me = mass of the electron

= 9.10953 10 ⁻³¹ kg

RB = Bohr radius = distance of the electron from the proton

 id = "027964757-00020005" />

From this:

Dcor = 1.476049 10 ⁻⁴³ MN

Dcor ² = 2.17872 10 ⁻⁸⁶ (Nm) ² ECOUL 10 ⁻⁶⁸

ECOUL = 2.17872 10 ⁻¹⁸ MN

= Electrostatic energy between proton and electron

The process of power generation is similar to known generators.

There, an armature rotates in a magnetic field and induces a sinusoidal alternating current by cutting the

lines of force of the magnetic field.

In the invention, the pyramid intersects on a daily rotation of the earth's gravitational field caused by the Sun-Earth and Coriolisbeschleunigung also a sinusoidal alternating current.


For this purpose, the pyramid height h_y or $\langle 3 \rangle$ is matched in a particular way to a particular sphere volume of the earth with radius r_E .

The advantage of the invention is a low-cost electricity without polluting the environment.

An energy conversion can be carried out according to the features of claim 4 in the reverse direction.

The occurring there factor $[\alpha]$ is an indication that electrical energy is converted into mechanical vibration energy.

It is



Located in the trough-shaped hollow body a person with suitable Body and Brain volume, the energy of his brain waves is enhanced by conversion to gravitational energy.



His thoughts can be transmitted over long distances.

Embodiment

In the drawing the invention is shown schematically.

FIG. 1 middle section of the pyramid

FIG. 2 Larger view of the cavity with volume V_1 and inside it hollow body with external volume V_2 .

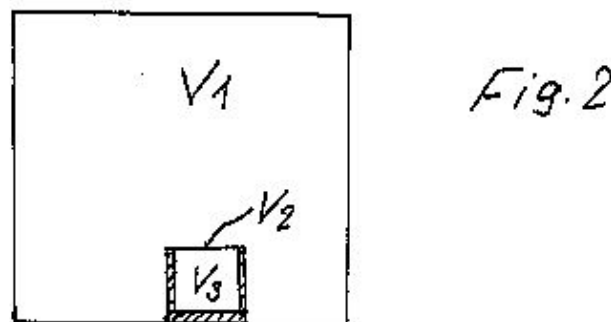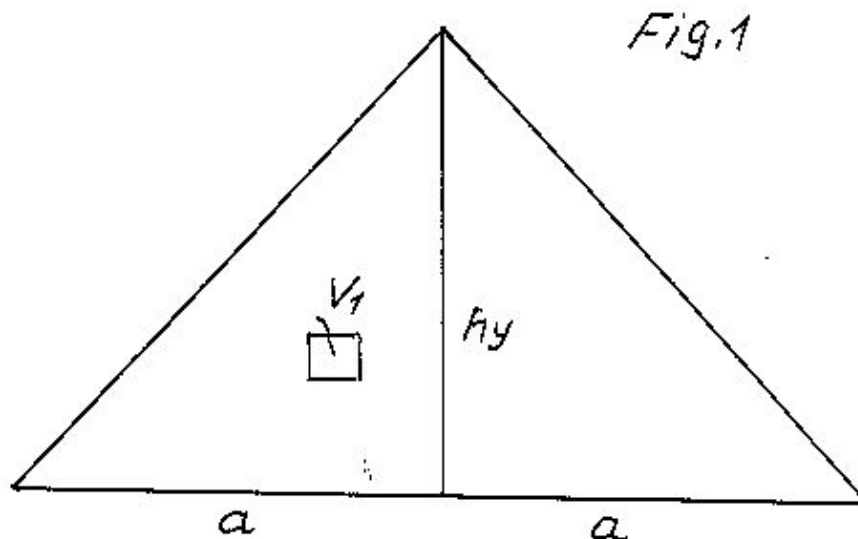

The internal volume V_3 of the hollow body is half as large as the external volume V_2 .

It is important for the function of the device that the volumes in the construction of the pyramid are adhered to as closely as possible.




The pyramid must have so much mass that change the volumes at different daytime and nighttime temperatures do not markedly.

Seasonal changes in volume are kept within limits when the pyramid is built near the equator.

DE19717053 / DE29724691
Energy pyramid for medical use

Inventor(s): AUER ARMIN C

FIGURE (1)

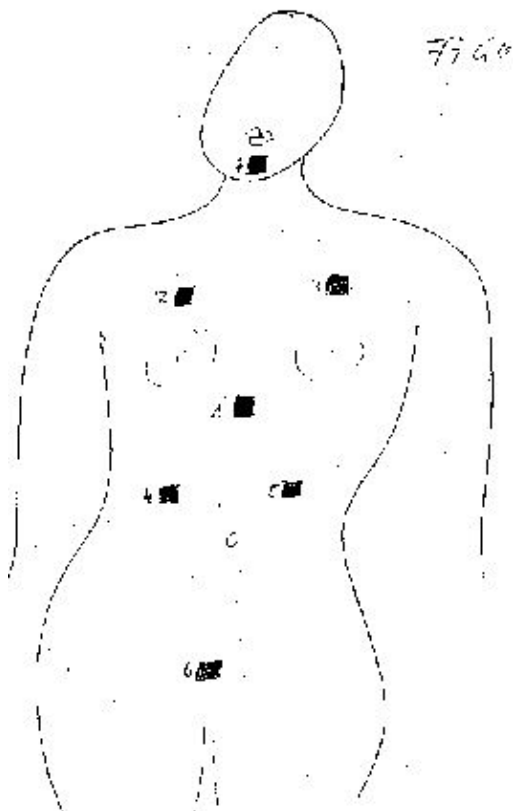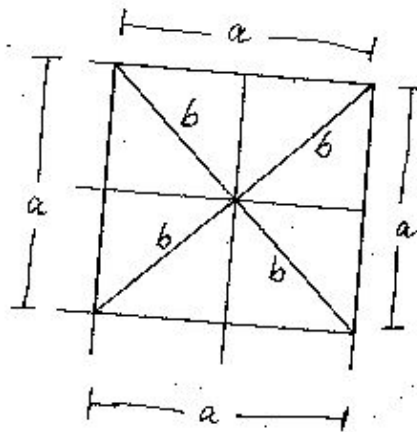

The aluminium or aluminium alloy pyramid has a base with 3-5 corners and equal or non-equal side lengths of 1-10 cm. Preferably the aluminium alloy has the composition 80-96, especially 87.4% Al, 5-15,

especially 9% Si, 1-6, especially 3% Cu, 0.08-1.0, especially 0.3% Mn and 0.08-1.0, especially 0.3% Mg. Also claimed is an arrangement of several such pyramids.

Pyramids of specific size and alloy

Pyramid or Pyramids special size and special aluminum alloy for power charging

The use of pyramid energy is common and known.

The use of pyramid energy is not unknown especially in the medical field.

The achievement of specific effect has not been possible because the pyramids used hitherto produced only an insufficient energy.

The problem of sufficient energy accumulation is achieved by the features listed in the protection claim 1:

The dependent claims represent advantageous embodiments of the invention.

An arrangement according to claim 6 is particularly noteworthy.

With the invention is achieved that the pyramid energy specifically in metabolic diseases and especially in diseases with mental component (including Allergies) can be used.

The necessity of certain sizes and certain alloy was determined empirically.

During these investigations were during the run of these pyramids to specific points on the patient for skin.

As severe pain and other clearly identifiable reactions observed, which led to cures.

The representation of a particularly advantageous embodiment of the invention is shown in Figure 1.

An inventive arrangement of several pyramids according to the invention is the Figure 2 below.

Inverted pyramid with a square base with

= 2.26 cm

0.951 x

advantageously aluminum alloy according to claim 4

Description 2

Innovative arrangement according to the invention of several pyramids

CN1617188

Pyramid energy focusing model and its making method

Inventor(s): LI YUANLIANG [CN]; LI YUJIAN [CN]; ZOU QIN

The energy focusing pyramid model is made of plastic, three-ply board, fiber board, granite and other insulating material and is shaped as rectangular pyramid or triangular pyramid with each side plane is one isosceles triangle of apex angle of 52 deg and base angle of 64 deg. It may be set inside bed room, office and class room to result in body building, disease preventing and treating effect, and entering to one large model will result in even high effect. Food or beverage may be set inside the model for preserving even long period. The reason is that the model can well absorb cosmic wave energy.



Your Support Maintains This Service --

BUY

The Rex Research Civilization Kit

... It's Your Best Bet & Investment in Sustainable Humanity on Earth ...

Ensure & Enhance Your Survival & Genome Transmission ...

Everything © rexresearch.com on a Data DVD !

[ORDER PAGE](#)
